


This PCB form fact main Spec.:  
 All Temperatur -40deg~+125deg  
 Absolute resolution 128~16384CPR  
 Analog Current or Voltage output

Max. Speed is 10,000 RPM  
 This shaft with magnet can  
 also be fixed on the opposite

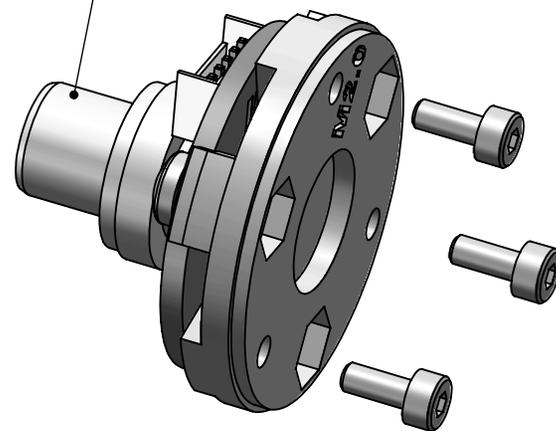

Male Connector on PCB

1. VCC(DC5V)
2. 4~20mA/0~5V
3. NC.
4. NC.
5. NC.
6. GND

(Unit:mm)

PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 Bluencoder(Suzhou) Technolgy Co.Ltd. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 Bluencoder(Suzhou) Technolgy Co.Ltd IS  
 PROHIBITED.

		DIMENSIONS ARE IN MM TOLERANCES: ±0.1 FRACTIONAL ± ANGULAR: MACH± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		NAME	DATE
		MATERIAL --		DRAWN	
		FINISH --		CHECKED	
NEXT ASSY		USED ON		ENG APPR.	
APPLICATION		DO NOT SCALE DRAWING		MFG APPR.	
				Q.A.	
				COMMENTS:	
				EA25S06A	
				Blue encoder(Suzhou)	
				 <b>Embedded Absolute Encoder</b>	
				SIZE A	DWG. NO.
				REV. v1.0	
				SCALE:	WEIGHT:
				SHEET OF	